


Ventilation Add-On Kit

Modular Skylights Bathrooms and laundry rooms are prone to high humidity. The Ventilation Add-On Kit provides the dual convenience of ventilation with daylight. Available for the Solatube® 160 DS, this innovative bathroom ventilation kit integrates fully into your Solatube® Daylighting System, offering a neat, stylish solution for lighting and ventilating your bathroom or ensuite while eliminating the need for multiple ceiling penetrations.



*Vent cap appearance may vary for different roof types.

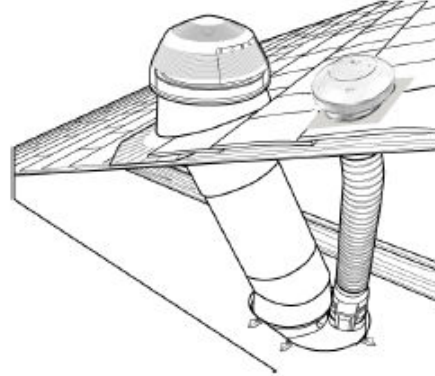

Flexible Duct

1. 150 mm diameter air duct (Class 1).
2. Local building codes may require air duct (Class 0) for certain fire-rated installations.

Installation

1. Service access is required to the Fan Motor Assembly Junction Box.
2. Space requirements: Minimum 12 1/2 in (320 mm) between ceiling joists and minimum 12 in (300 mm) vertical clearance above ceiling is required.
3. Ventilation fan should remain on for a minimum of 10 minutes in a bathroom after a shower.



Technical Data

Model	Dia ø	V	Hz	W	Phase	RPM	L/s	m ³ /hr	dBA
A60	150 mm	240	50	35	1	2P	91	328	41